



Norsat
International Inc.

Intelligent Satellite Solutions




MICROWAVE COMPONENT

L-BAND LINE AMPLIFIER LA30

APPLICATIONS

- Provides a range of amplification at 950 to 2150 MHz
- Passes L-Band, 10MHz, 22kHz and DC signals with minimal loss
- Handles the current requirement of the LNB
- Rugged die cast aluminum chassis
- Environmentally sealed and moisture resistant

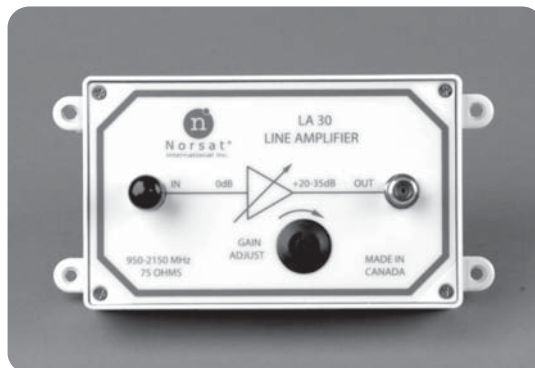

TYPICAL SPECIFICATIONS

L-Band frequency range	950 to 2150 MHz	Noise figure maximum	5 dB
L-Band input range	-6 to -30dBm	DC through current maximum	1 A between 12 to 30 V
Conversion gain	26 dB minimum 35 dB maximum	Operating voltage	+12 to +30V
Input VSWR	2.2 : 1	Operating current maximum	175 mA
Output VSWR	2.2 : 1	Dimensions	161 (L) x 85 (W) x 51 (H) mm (6.4 x 3.4 x 2.0 in)
		Weight	500 g / 17.5 oz



Norsat
International Inc.

Americas

tel + 1.800.644.4562
fax + 1.604.821.2801

Asia

tel +1 604.821.2835
fax +1 604.821.2801

Europe, Middle East & Africa

tel + 44.1522.730800
fax + 44.1522.730927

Online

info@norsat.com
www.norsat.com